

DLQS-6-NYDOT-* and DLQS-8-NYDOT-* Quick Stick TRAFFIC DIRECTOR



Important: This product is used to **direct** traffic. Improper use may result in vehicular collision, personal injury and/or death. Star Safety Technologies and its subsidiaries shall not be held responsible for damages directly or indirectly caused by improper use of this product.



These lights utilize high-intensity LEDs. Do not stare directly into the light while it is on, as momentary blindness and/or permanent eye damage may occur.

LED FIVE YEAR LIMITED WARRANTY

Star Safety Technologies warrants this LED light against factory defects in material and workmanship for five years after the date of manufacture. The owner will be responsible for returning to the Service Center any defective item(s) with the transportation costs prepaid. The manufacturer will, without charge, repair or replace at its option, products, or part(s), which its inspection determines to be defective. Repaired or replacement item(s) will be returned to the purchaser with transportation costs prepaid from the service point. A copy of the purchaser's receipt must be returned with the defective item(s) in order to qualify for the warranty coverage. Exclusions from this warranty include, but are not limited to, domes, and/or the finish. This warranty shall not apply to any light, which has been altered, such that in the manufacturer's judgment, the performance or reliability has been affected, or if any damage has resulted from abnormal use or service.

There are no warranties expressed or implied (including any warranty of merchantability or fitness), which extend this warranty period. **The loss of use of the product, loss of time, inconvenience, commercial loss or consequential damages, including costs of any labor, are not covered.** Star reserves the right to change the design of the product without assuming any obligation to modify any product previously manufactured.

This warranty gives you specific legal rights. You might also have additional rights that may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts. Some states do not allow the exclusion or limitation of incidental or consequential damages. Therefore, the above limitation(s) or exclusion(s) may not apply to you.

If a product must be returned for any reason, please contact our Repair Department at (585) 226-9500 to obtain a Returned Materials Authorization number (RMA #) before you ship the product back. Please write the RMA # clearly on the package near the mailing label.

If you have any questions concerning this or any other product, please contact our **Customer Service Department** at (585) 226-9500.



455 Rochester Street Avon, NY 14414
585-226-9500 (F) 888-478-2797
www.StarSafetyTechnologies.com

Before beginning the installation:

- Determine where the Traffic Director is to be mounted (on the rear of the vehicle, on your roof, in your rear window, etc.).
- Check to see that there are no obstructions hindering the visibility of your traffic director.
- Select an appropriate location to mount the controller.
- Take into consideration the path the harness will take.
- When mounted rear-facing, the harness should exit the left side of the Traffic Director when you are facing it.




Electrical Connections


Refer to the instruction manual enclosed with the controller and connect the wires from the harness as directed.

Mounting Instructions

1. There are two slots along the length of the lightstick that can be used to facilitate mounting. Depending upon your application, slide the two enclosed #10 carriage bolts into the appropriate slot (rear or bottom).
2. Slide them along the channel to the desired location and mark the locations for your mounting holes on the mounting surface.
3. Drill your holes and mount the light using the enclosed washers and nuts.



We also include two L-Brackets to facilitate mounting. These are optional and do not need to be used.

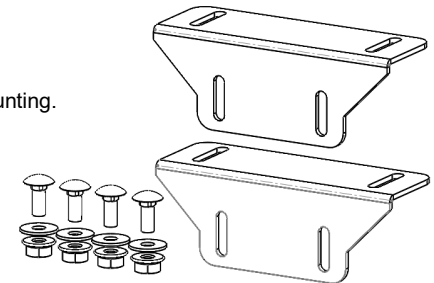

Please Note: These instructions are provided as a general guideline only. **Some vehicles may require special mounting, wiring, and/or weather-sealing. This is the sole responsibility of the installer.** Star Safety Technologies assumes no responsibility for the integrity of the installation for this or any of its products.



Because of the wide variety of mounting applications, Star Safety Technologies assumes no responsibility for the secure mounting of this light. It is the responsibility of the installer and/or owner to ensure the lightbar is mounted securely. Check your light every time you use the vehicle to ensure that it is mounted securely.

DLQS-6-NYDOT-* and DLQS-8-NYDOT-* Quick Stick TRAFFIC DIRECTOR



Important: This product is used to **direct** traffic. Improper use may result in vehicular collision, personal injury and/or death. Star Safety Technologies and its subsidiaries shall not be held responsible for damages directly or indirectly caused by improper use of this product.



These lights utilize high-intensity LEDs. Do not stare directly into the light while it is on, as momentary blindness and/or permanent eye damage may occur.

LED FIVE YEAR LIMITED WARRANTY

Star Safety Technologies warrants this LED light against factory defects in material and workmanship for five years after the date of manufacture. The owner will be responsible for returning to the Service Center any defective item(s) with the transportation costs prepaid. The manufacturer will, without charge, repair or replace at its option, products, or part(s), which its inspection determines to be defective. Repaired or replacement item(s) will be returned to the purchaser with transportation costs prepaid from the service point. A copy of the purchaser's receipt must be returned with the defective item(s) in order to qualify for the warranty coverage. Exclusions from this warranty include, but are not limited to, domes, and/or the finish. This warranty shall not apply to any light, which has been altered, such that in the manufacturer's judgment, the performance or reliability has been affected, or if any damage has resulted from abnormal use or service.

There are no warranties expressed or implied (including any warranty of merchantability or fitness), which extend this warranty period. **The loss of use of the product, loss of time, inconvenience, commercial loss or consequential damages, including costs of any labor, are not covered.** Star reserves the right to change the design of the product without assuming any obligation to modify any product previously manufactured.

This warranty gives you specific legal rights. You might also have additional rights that may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts. Some states do not allow the exclusion or limitation of incidental or consequential damages. Therefore, the above limitation(s) or exclusion(s) may not apply to you.

If a product must be returned for any reason, please contact our Repair Department at (585) 226-9500 to obtain a Returned Materials Authorization number (RMA #) before you ship the product back. Please write the RMA # clearly on the package near the mailing label.

If you have any questions concerning this or any other product, please contact our **Customer Service Department** at (585) 226-9500.

STAR
Safety Technologies by *Cipote*

455 Rochester Street Avon, NY 14414
585-226-9500 (F) 888-478-2797
www.StarSafetyTechnologies.com

PLIT563NY REV. A 4/3/24

Before beginning the installation:

- Determine where the Traffic Director is to be mounted (on the rear of the vehicle, on your roof, in your rear window, etc.).
- Check to see that there are no obstructions hindering the visibility of your traffic director.
- Select an appropriate location to mount the controller.
- Take into consideration the path the harness will take.
- When mounted rear-facing, the harness should exit the left side of the Traffic Director when you are facing it.




Electrical Connections


Refer to the instruction manual enclosed with the controller and connect the wires from the harness as directed.

Mounting Instructions

1. There are two slots along the length of the lightstick that can be used to facilitate mounting. Depending upon your application, slide the two enclosed #10 carriage bolts into the appropriate slot (rear or bottom).
2. Slide them along the channel to the desired location and mark the locations for your mounting holes on the mounting surface.
3. Drill your holes and mount the light using the enclosed washers and nuts.



We also include two L-Brackets to facilitate mounting. These are optional and do not need to be used.

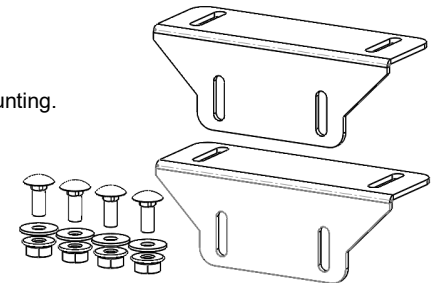

Please Note: These instructions are provided as a general guideline only. **Some vehicles may require special mounting, wiring, and/or weather-sealing. This is the sole responsibility of the installer.** Star Safety Technologies assumes no responsibility for the integrity of the installation for this or any of its products.



Because of the wide variety of mounting applications, Star Safety Technologies assumes no responsibility for the secure mounting of this light. It is the responsibility of the installer and/or owner to ensure the lightbar is mounted securely. Check your light every time you use the vehicle to ensure that it is mounted securely.