

## ONE YEAR LIMITED WARRANTY

The manufacturer warrants each new product, under normal use, against factory defects in material and workmanship for one year after the date of purchase. The owner will be responsible for returning to the Service Center any defective item(s) with the transportation costs prepaid. The manufacturer will, without charge, **repair or replace at its option**, products, or part(s), which its inspection determines to be defective. Repaired or replacement item(s) will be returned to the purchaser with transportation costs prepaid from the service point. A copy of the purchaser's receipt must be returned with the defective item(s) in order to qualify for the warranty coverage.

Exclusions from this warranty include, but are not limited to, bulbs, strobe tubes, domes, and/or the finish. This warranty shall not apply to any light, which has been altered, such that in the manufacturer's judgment, the performance or reliability has been affected, or if any damage has resulted from abnormal use or service. This warranty does not apply to defect or damage occurring as a result of disaster, accident, abuse, misuse, lightning, power surges, or failure to follow instructions in any enclosed manuals. Any damage or defects occurring as a result of any unauthorized service or repairs by unauthorized persons shall be excluded from this warranty.

There are no warranties expressed or implied (including any warranty of merchantability or fitness), which extend this warranty period. **The loss of use of the product, loss of time, inconvenience, commercial loss, or consequential damages, including costs of any labor, are not covered.** The manufacturer reserves the right to change the design of the product without assuming any obligation to modify any product previously manufactured.

This warranty gives you specific legal rights. You might also have additional rights which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts. Some states do not allow the exclusion or limitation of incidental or consequential damages. Therefore, the above limitation(s) or exclusion(s) may not apply to you.


If you have any questions concerning this or any other product, please contact our **Customer Service Department** at (585) 226-9025.

If a product must be returned for any reason, please contact our Customer Service Department to obtain a Returned Materials Authorization Number (RMA #) before you ship the product back. Please write the RMA # clearly on the package near the mailing label.

### NOTICE

Due to continuous product improvements, we must reserve the right to change any specifications and information, contained in this manual at any time without notice. The manufacturer makes no warranty of any kind with regard to this manual, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The manufacturer shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this manual.

# SPBRK-24 CYCLONE SPEAKER MOUNTING KIT 2007-2011 Ford Expedition

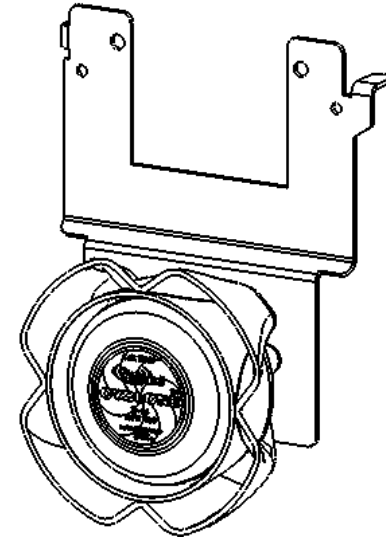

PROUDLY MADE IN THE USA  
An ISO 9001-2000 Certified Company



**WARNING: ALWAYS WEAR HEARING PROTECTION PER OSHA 1910**

## Star Headlight & Lantern Co., Inc.

455 Rochester Street Avon, NY 14414

Phone: 585-226-9787 FAX: 888-478-2797



[www.starheadlight.com](http://www.starheadlight.com)

## Star Headlight & Lantern Co., Inc.

455 Rochester Street Avon, NY 14414

Phone: 585-226-9787 FAX: 888-478-2797



[www.starheadlight.com](http://www.starheadlight.com)

## INSTALLATION

### 1. Mark and remove bolts:

- Mark hood latch bolts with a permanent marker to ease re-alignment.
- Remove hood latch bolts.
- Set hood latch mechanism aside.
- Do not remove hood latch cable from assembly.

### 2. Locate speaker:

- Place speaker/bracket assembly in hood latch cavity.
- Insert the two tabs from the back of the bracket into the holes in the core support.
- Align mounting holes with the existing holes in the core support. (SEE FIG 1)
- Using the hood latch hardware install the speaker bracket assembly.


### 3. Reinstall hood latch mechanism:

- Reinstall hood mechanism to its original position using previously marked locations.
- Reinstall bolts and torque to proper torque specification.

### 4. Route wires:

- Route wires so they are not in contact with any sharp or abrasive surface.
- Fasten securely to nearby features.
- Refer to siren installation manual for wiring connections.

EXISTING HOOD LATCH  
MOUNTING HOLES

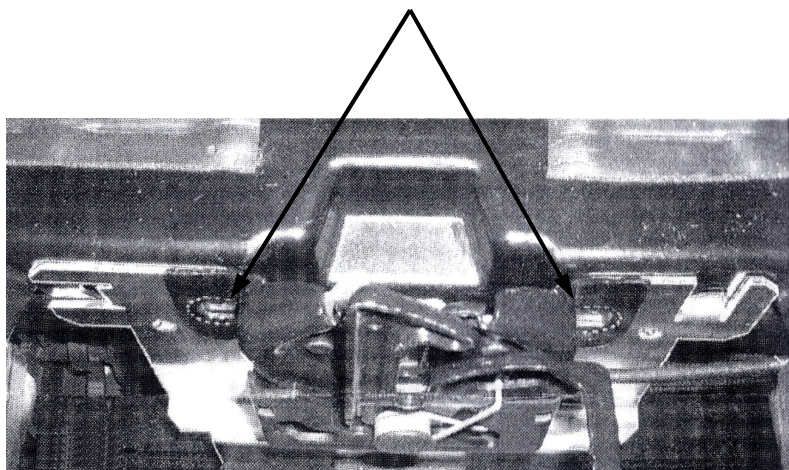

## CYCLONE MOUNTING OPTIONS:

MODEL #	DESCRIPTION	BRACKET PART #
D-44	SPEAKER ONLY	NO BRACKET
SPBRK-16	04-05 DURANGO, 01 TAURUS, 02-09 FORD EXPLORER 04-09 GMC ENVOY, 02-09 CHEVROLET AVALANCH 04-06 CHEVROLET SUBURBAN / TAHOE UNIVERSAL "L" BRACKET	P30150-237P
SPBRK-17	03-09 CROWN VICTORIA (CENTER MOUNT)	P30150-238P
SPBRK-18	07-09 CHEVROLET SUBURBAN / TAHOE	P30150-239P
SPBRK-19	06-09 IMPALA	P30150-240P
SPBRK-20	06-09 CHARGER, 05-08 MAGNUM	P30150-241P
SPBRK-21	TWO PIECE ADJUSTABLE BRACKET	S30150-218 / P30150-218AP
SPBRK-22	08-09 FORD F250 & F350	P30150-260(R/L)
SPBRK-23	08-09 FORD F350 & F450	P30150-261P
SPBRK-24	07-11 FORD EXPEDITION	P30150-291P
SPBRK-25	2010 DODGE AVANGER	P30150-292P



**WARNING: ALWAYS WEAR HEARING PROTECTION PER OSHA 1910.95**

### !!! WARNING !!!

Devices should be mounted only in locations listed in SAE standard J1849. Assure clearances before drilling in vehicle. Sound levels produced by speakers can cause permanent hearing loss. Never operate this unit without adequate hearing protection for you and others in the area. (OSHA 1910.95)