


Model SH3940

Remote Strobe Head



IMPORTANT: Please read all of the following instructions before installing your new warning light. This instruction sheet applies only to the model listed at the top of this sheet.

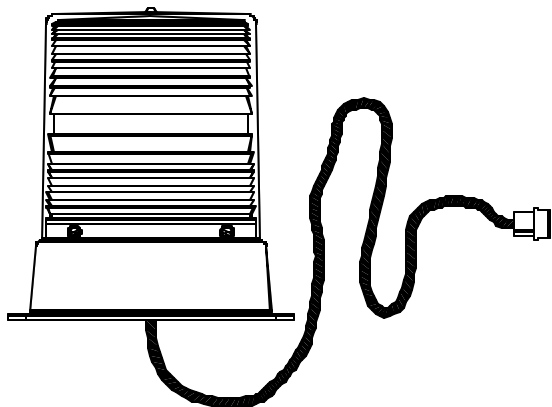

CAUTION: High voltages exist in electronic strobe lights. Before attempting service on any strobe light, be sure to disconnect the power for at least five minutes to allow the capacitor to discharge. Failure to heed this warning may result in severe electrical shock and/or injury.

Please Note: Most strobe and rotating beacon failures can be traced to wiring and battery problems. Before attempting any service on the circuit itself, please be sure to check all connections and wiring to ensure the correct voltage and/or polarity is reaching your light or remote head.


Please Note: *The Model SH3940 is a remote strobe head and MUST be connected to a remote strobe power supply. It is not designed to flash when connected DIRECTLY to +12 VDC.*

1. Your new warning light comes complete with a foam mounting gasket, two mounting screws, two lock washers, and two rubber well nuts.
2. Remove the foam gasket from the shipping box. Each gasket comes furnished with three holes, two outer and a center hole. (NOTE: You may have to stretch the gasket to find the location of the three holes.) Place the gasket in the exact position the light is to be mounted.
3. Using the gasket as a template, mark three holes on the mounting surface. Take care to ensure that the gasket does not move while you are marking each of the three holes.

4. Remove the gasket and drill a 3/8" hole in the **two outer locations only**. Drill a 1" hole in the center location for the cable, taking care to remove any burrs and file any sharp edges that may damage the cable.

CAUTION: Take care not to drill through the headliner of the vehicle below.

5. Push the enclosed rubber well nuts through the two outer holes in the vehicle, until the bottom side of the wider lip rests on the surface of the vehicle.
6. Route your cable through the center hole.
7. Place the gasket and light over the well nuts and align the holes in the flanges with the well nuts. Insert the mounting screws and tighten until snug.
8. Connect the cable to an appropriate strobe power supply.



ONE YEAR LIMITED WARRANTY

The manufacturer warrants each new product, under normal use, against factory defects in material and workmanship for one year after the date of purchase. The owner will be responsible for returning to the Service Center any defective item(s) with the transportation costs prepaid. The manufacturer will, without charge, **repair or replace at its option**, products, or part(s), which its inspection determines to be defective. Repaired or replacement item(s) will be returned to the purchaser with transportation costs prepaid from the service point. A copy of the purchaser's receipt must be returned with the defective item(s) in order to qualify for the warranty coverage.

Exclusions from this warranty include, but are not limited to, bulbs, strobe tubes, domes, and/or the finish. This warranty shall not apply to any light, which has been altered, such that in the manufacturer's judgment, the performance or reliability has been affected, or if any damage has resulted from abnormal use or service. This warranty does not apply to defect or damage occurring as a result of disaster, accident, abuse, misuse, lightning, power surges, or failure to follow instructions in any enclosed manuals. Any damage or defects occurring as a result of any unauthorized service or repairs by unauthorized persons shall be excluded from this warranty.

There are no warranties expressed or implied (including any warranty of merchantability or fitness), which extend this warranty period. **The loss of use of the product, loss of time, inconvenience, commercial loss or consequential damages, including costs of any labor, are not covered.** The manufacturer reserves the right to change the design of the product without assuming any obligation to modify any product previously manufactured.

If a product must be returned for any reason, please contact our Customer Service Department to obtain a Returned Goods Authorization number (RGA #) before you ship the product back. Please write the RGA # clearly on the package near the mailing label.

To obtain warranty service, or if you have any questions concerning this or any other Star product, please contact our **Customer Service Department** at (585) 226-9787.

Star Headlight & Lantern Co., Inc.

455 Rochester Street Avon, NY 14414

Phone: 585-226-9787 FAX: 888-478-2979



www.starheadlight.com

Star Headlight & Lantern Co., Inc.

455 Rochester Street Avon, NY 14414

Phone: 585-226-9787 FAX: 888-478-2979



www.starheadlight.com