


## BBK6VER-1-FISUV

### 2015-2016 Ford Interceptor SUV DLX3/4/6 Enclosed Rear Spoiler Bracket

***Please Note:*** These instructions are provided as a general guideline only. ***Some vehicles may require special mounting, wiring, and/or weather-sealing. This is the sole responsibility of the installer.*** Star Headlight & Lantern Co., Inc. assumes no responsibility for the integrity of the installation for this or any of its products.

1. Using the mounting instructions that were enclosed with the VersaStar™ lights, install your lights onto the brackets accordingly and route the pigtails from each light through the appropriate hole in the back of each bracket.
2. Remove the rear spoiler of the vehicle. Refer to the manufacturer's Sedan and Utility Police Interceptor Modifier's Guide (or other upfitter's guide) for details on doing this.
3. Align the top of the side piece on the mounting the bracket with the top of the rear window.

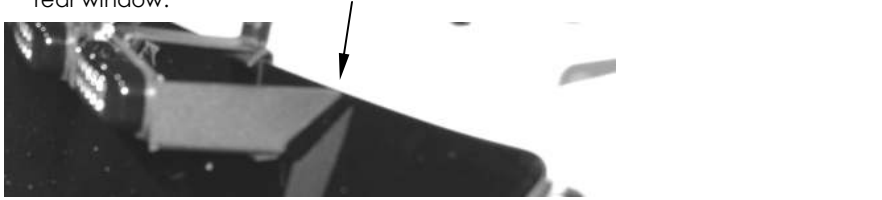

4. Position it 4-1/2" from the outer edge of the window. Using the bracket as a template, mark the two locations for the mounting holes. Repeat for the other side.



5. Remove the bracket and carefully drill a 3/8" hole in both locations.
  6. Install one of the rubber well nuts into each of the drilled holes and attach the brackets using the enclosed screws.
- TAKE CARE NOT TO OVER-TIGHTEN THE SCREWS AND STRIP THE HOLES!!!**



7. Repeat steps 3-6 for the opposite side.



8. Connect the enclosed harness to the three lights from each bracket and route the wires into the access hole located on the top of the rear hatch. Use the self adhesive tie downs and zip ties to secure the harness.

9. Removal of the interior trim above the rear window is necessary when removing the spoiler. Use the exposed holes for access and route the harness through the rubber tubing that connects the hatch to the rear of the vehicle.



10. The headliner is secured by magnetic clips. Carefully pull the headliner away from the roof, allowing you to feed the harness through.

11. Route the harness under the trim, down the pillars on either side of the rear hatch opening and on to your switch panel.

## **Head Programming**

- **ALL LIGHTS SHIPPED WITH THE CONSTELLATION KITS WILL BE PRE-PROGRAMMED FOR THE QUADFLASH PATTERN!!**
  - Reference the manual enclosed with each head for details on Pattern Programming and Synchronization.
1. Connect only the heads that you wish to flash **simultaneously** and activate them.
  2. Using the Pattern Select wire from the harness, program those heads for the desired pattern.
  3. Power the unit down, unplug those heads, and then connect the heads you would like to program to **alternate** with the first head(s).
  4. Program the second head(s) for the same **Pattern**, but the opposite **Phase**.
  5. Power the unit down, then connect all of the heads to the harness



**Star Headlight & Lantern Co., Inc.**

455 Rochester Street Avon, NY 14414 Phone: 585-226-9787 FAX: 888-478-2797

**STAR**  
WARNING  
SYSTEMS

**STAR**  
SIGNAL  
VEHICLE PRODUCTS

**BRADFORD**  
Vehicle Solutions

[www.starheadlight.com](http://www.starheadlight.com)