

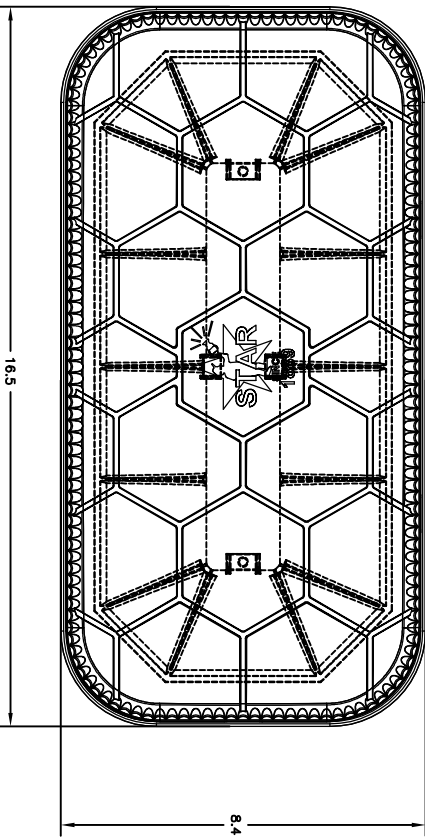


REV.	ECR	DESCRIPTION	DATE
-	11527	INITIAL DRAWING REQUEST	11/07/2013
A	12253	ADDED NEW TABLE TO INCLUDE NEWER MODELS	10/15/2014

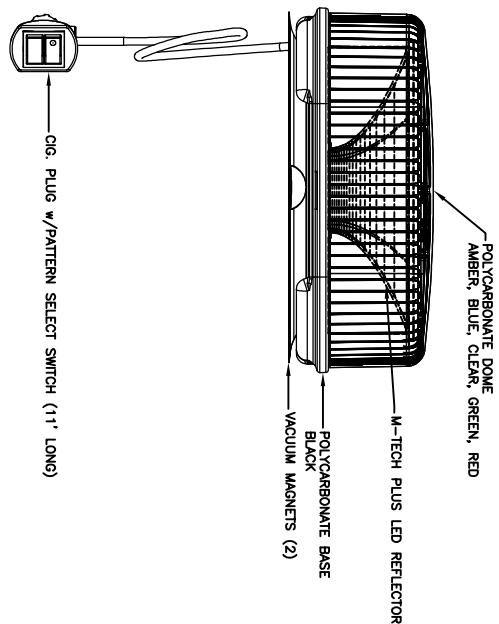

MODEL #	VACUUM MAGNET	CIG PLUG	CLEAR DOME	COLOR DOME	APPROVAL	INPUT VOLTAGE RANGE	CURRENT DRAW (A)
9100LEDV-A	X	X			SAE J845 CLASS 1	10-16VDC	2.3A
9100LEDV-AA-C	X	X	X		SAE J845 CLASS 1	10-16VDC	2.3A
9100LEDV-AB	X	X	X		SAE J845 CLASS 1	10-16VDC	2.3A
9100LEDV-AW	X	X	X		SAE J845 CLASS 1	10-16VDC	2.3A
9100LEDV-B	X	X			SAE J845 CLASS 1	10-16VDC	2.3A
9100LEDV-G	X	X			N/A	10-16VDC	2.3A
9100LEDV-R	X	X			SAE J845 CLASS 2	10-16VDC	2.3A
9100LEDV-RB	X	X	X		SAE J845 CLASS 2	10-16VDC	2.3A
9100LEDV-T13-A	X	X		X	SAE J845 CLASS 1, CA13	10-16VDC	2.3A
9100LEDV-W	X	X		X	SAE J845 CLASS 1	10-16VDC	2.3A
E3100LEDV-ECEA	X	X		X	SAE J845 CLASS 1, CA13, REG 65 TA1	9-16VDC	2.3A
E3100LEDV-ECEA	X	X		X	SAE J845 CLASS 1, CA13, REG 65 TR1	9-16VDC	2.3A

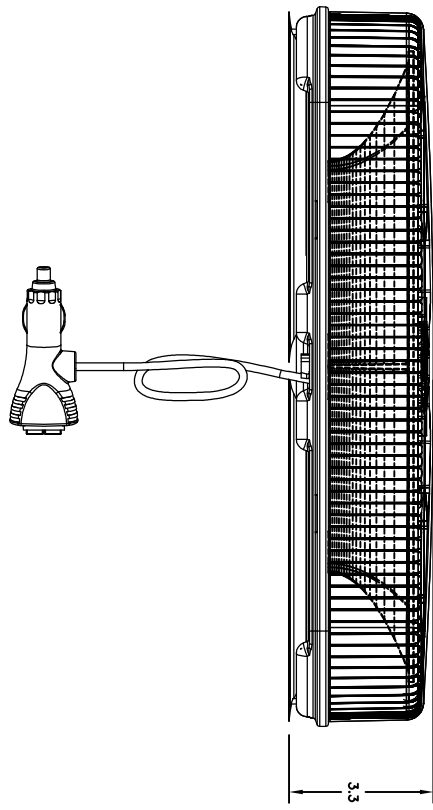

- NOTES:
- 1) INSTRUCTION SHEET P/N PLT470
 - 2) OPERATING TEMPERATURE RANGE: -30°C TO 50°C
 - 3) 20 FLASH PATTERNS

UNLESS OTHERWISE SPECIFIED:		DRAWN BY: TA	
DIMENSIONS ARE IN INCHES Dial Tolerances ± 0.003		DRAWING APPROVED BY ECR	
ARTWORK AND BOARD SIZE TOLERANCES: ANGULAR: ± 2 DEG. X ± .100 XX ± .020 XXX ± .005 XXXX ± .001		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STAR HEADLIGHT & LANTERN CO., INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STAR HEADLIGHT & LANTERN CO., INC. IS STRICTLY PROHIBITED.	
ROHS COMPLIANT: NO	MATERIAL: N/A	DWG. NO. 9100LEDV	REV A
FINISH: N/A		SCALE: 1:1	DO NOT SCALE FROM DRAWING
STAR HEADLIGHT & LANTERN CO., INC. 455 ROCHESTER ST. AVON NY 14414 PH: (585)226-9500 FAX: (585) 226-2029		SHEET 1 OF 1	